


# ■ Ubuntu インストールガイド


1. マシンの電源を入れます。DVD ドライブに Ubuntu のインストールディスクを入れ、一度マシンをシャットダウンします。  
再度マシンの電源を入れたらすぐに [F11] キーを連打し、Boot メニューを起動します。




2. Boot メニューが起動したら、「UEFI (なければ AHCI) : DVD ドライブ名」を選択し、[Enter] キーを押します。

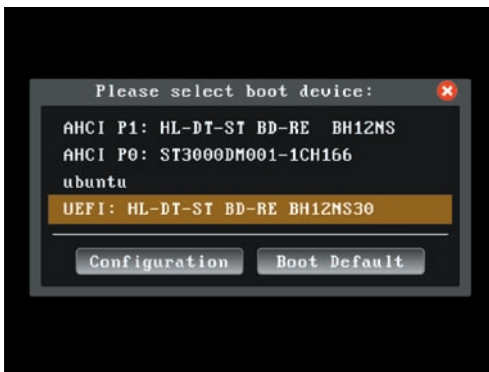

3. GRUB メニューが起動したら、「Install Ubuntu」を選択します。  
Ubuntu のインストーラが起動します。

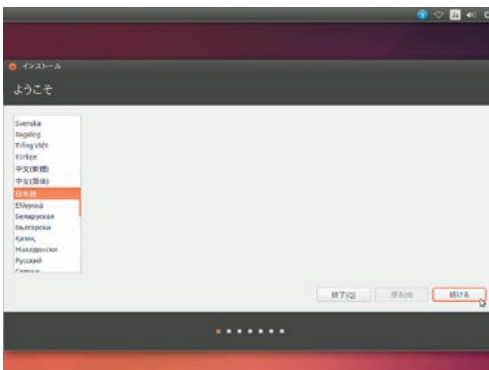

4. ようこそ  
画面左のメニューから [日本語] を選択し [続ける] ボタンを押します。

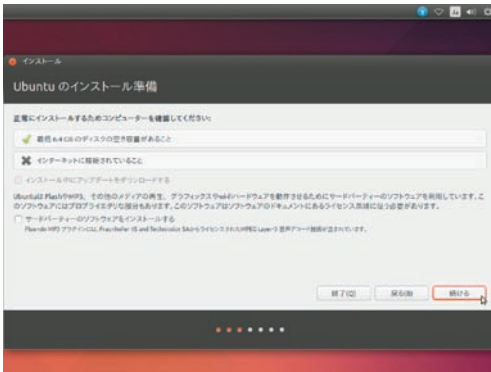

## 5. Ubuntu のインストール準備

チェックボックスは選択せずに [ 続ける ] ボタンを押します。


※ [ インストール中にアップデートをダウンロードする ] と [ サードパーティのソフトウェアをインストールする ] をチェックしてインストールすると、続く Linuxmania カスタマイズが失敗する可能性があるため、アップデートはカスタマイズ終了後に行うことをお勧めいたします。

※インターネットに接続していなくても問題ありません。




## 6. インストールの種類

[ Ubuntu XXX を削除して再インストール ] を選択し [ インストール (I) ] ボタンを押します。Ubuntu のインストールが始まります。

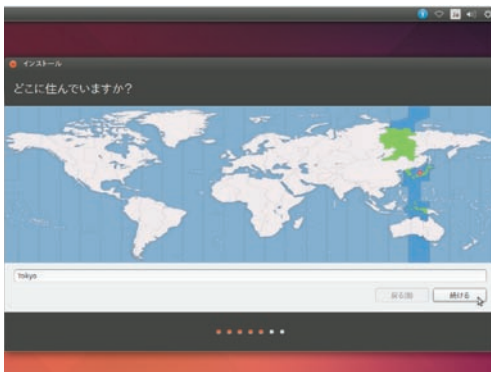


## 7. どこに住んでいますか? (タイムゾーン)

[ Tokyo ] が選択されていることを確認して [ 続ける ] ボタンを押します。

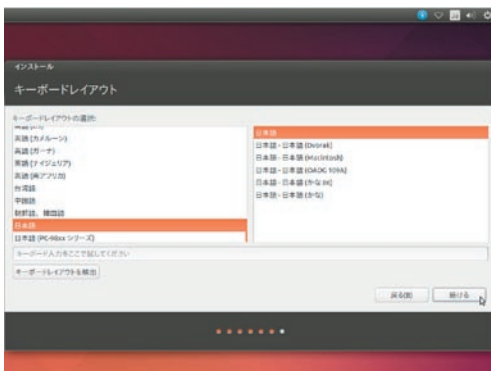

## 8. キーボードレイアウト


[ 日本語 ] が選択されていることを確認して [ 続ける ] ボタンを押します。

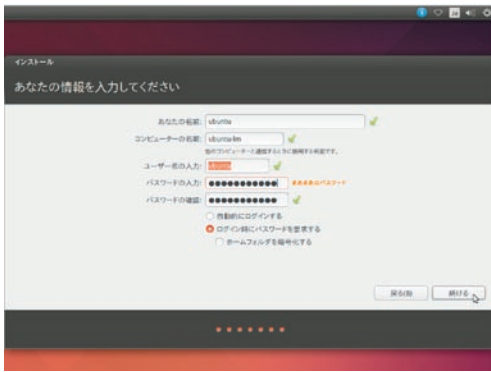

9. あなたの情報を入力してください (初期アカウント)  
お使いになりたいユーザー名とパスワードを入力してください。



10. 残りのインストールが続きます

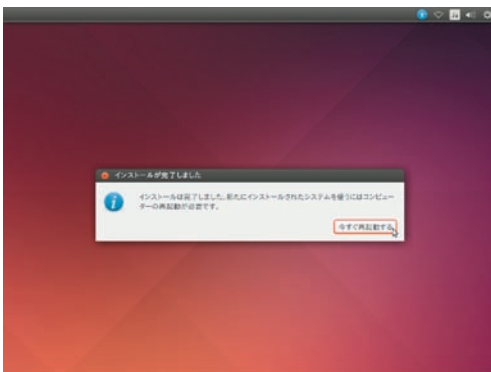

11. インストールが完了  
[今すぐ再起動する] ボタンを押します。



12. 「 Please remove the disc, close the tray ( if any ) and press ENTER: 」  
という表示が出たらインストールディスクを取り出してください。  
[ Enter ] キーを押すと再起動します。

```
* Deconfiguring network interfaces... [ OK ]
* Reactivating swap... [ OK ]
* Stopping remaining crypto disks... [ OK ]
* Stopping early crypto disks... [ OK ]
* casper is rescuing snapshots and caching reboot files...
[ 2400.129663] end request: I/O error, dev sr0, sector 504624
[ 2400.154631] Buffer I/O error on device sr0, logical block 126156
[ 2400.179241] Buffer I/O error on device sr0, logical block 126157
[ 2400.197559] Buffer I/O error on device sr0, logical block 126158
[ 2400.218686] Buffer I/O error on device sr0, logical block 126159
[ 2400.223525] Buffer I/O error on device sr0, logical block 126160
[ 2400.236272] Buffer I/O error on device sr0, logical block 126161
[ 2400.253836] Buffer I/O error on device sr0, logical block 126162
[ 2400.265354] Buffer I/O error on device sr0, logical block 126163
[ 2400.279966] end request: I/O error, dev sr0, sector 504624
[ 2400.296975] Buffer I/O error on device sr0, logical block 126156
[ 2400.309290] Buffer I/O error on device sr0, logical block 126157
[ 2400.327942] squashfs error: squashfs_read_data failed to read block 0xf3c98e2
[ 2400.358821] squashfs error: Unable to read fragment cache entry [f3c98e2]
[ 2400.357171] squashfs error: Unable to read page, block f3c98e2, size 1c71b
[ 2400.371590] squashfs error: Unable to read fragment cache entry [f3c98e2]
[ 2400.386990] squashfs error: Unable to read page, block f3c98e2, size 1c71b
[ 2400.416591] squashfs error: Unable to read fragment cache entry [f3c98e2]
[ 2400.431617] squashfs error: Unable to read page, block f3c98e2, size 1c71b
error: unexpectedly disconnected from boot status daemon
init: plymouth post-start process (20945) terminated with status 2
init: plymouth main process (20944) killed by SIG signal
Please remove the disc and close the tray (if any) then press ENTER:
[init: plymouth-splash main process (21211) terminated with status 1
```


※環境によっては、Ubuntu のロゴが表示されずに、左のような画面で

「Please remove the disc and close the tray ( if any ) then press ENTER: 」

と表示される場合があります。

また、「Buffer I/O error」の行が大量に表示されるため、このメッセージが見えなくなる場合がありますが、いずれも [Enter] キーを押して進めてください。

[Enter] キーを押して再起動すれば、問題ありません。

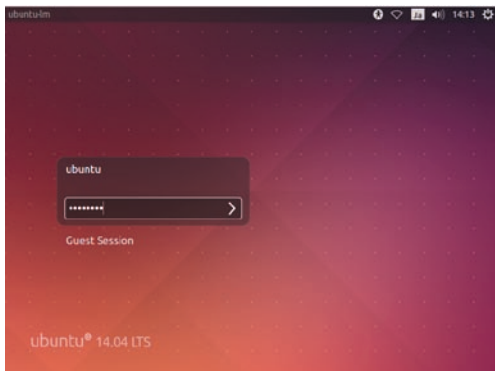

### 13. ログイン画面

手順書「Linuxmania カスタマイズディスクについて」に従い、カスタマイズの実行 .sh を行ってください。